

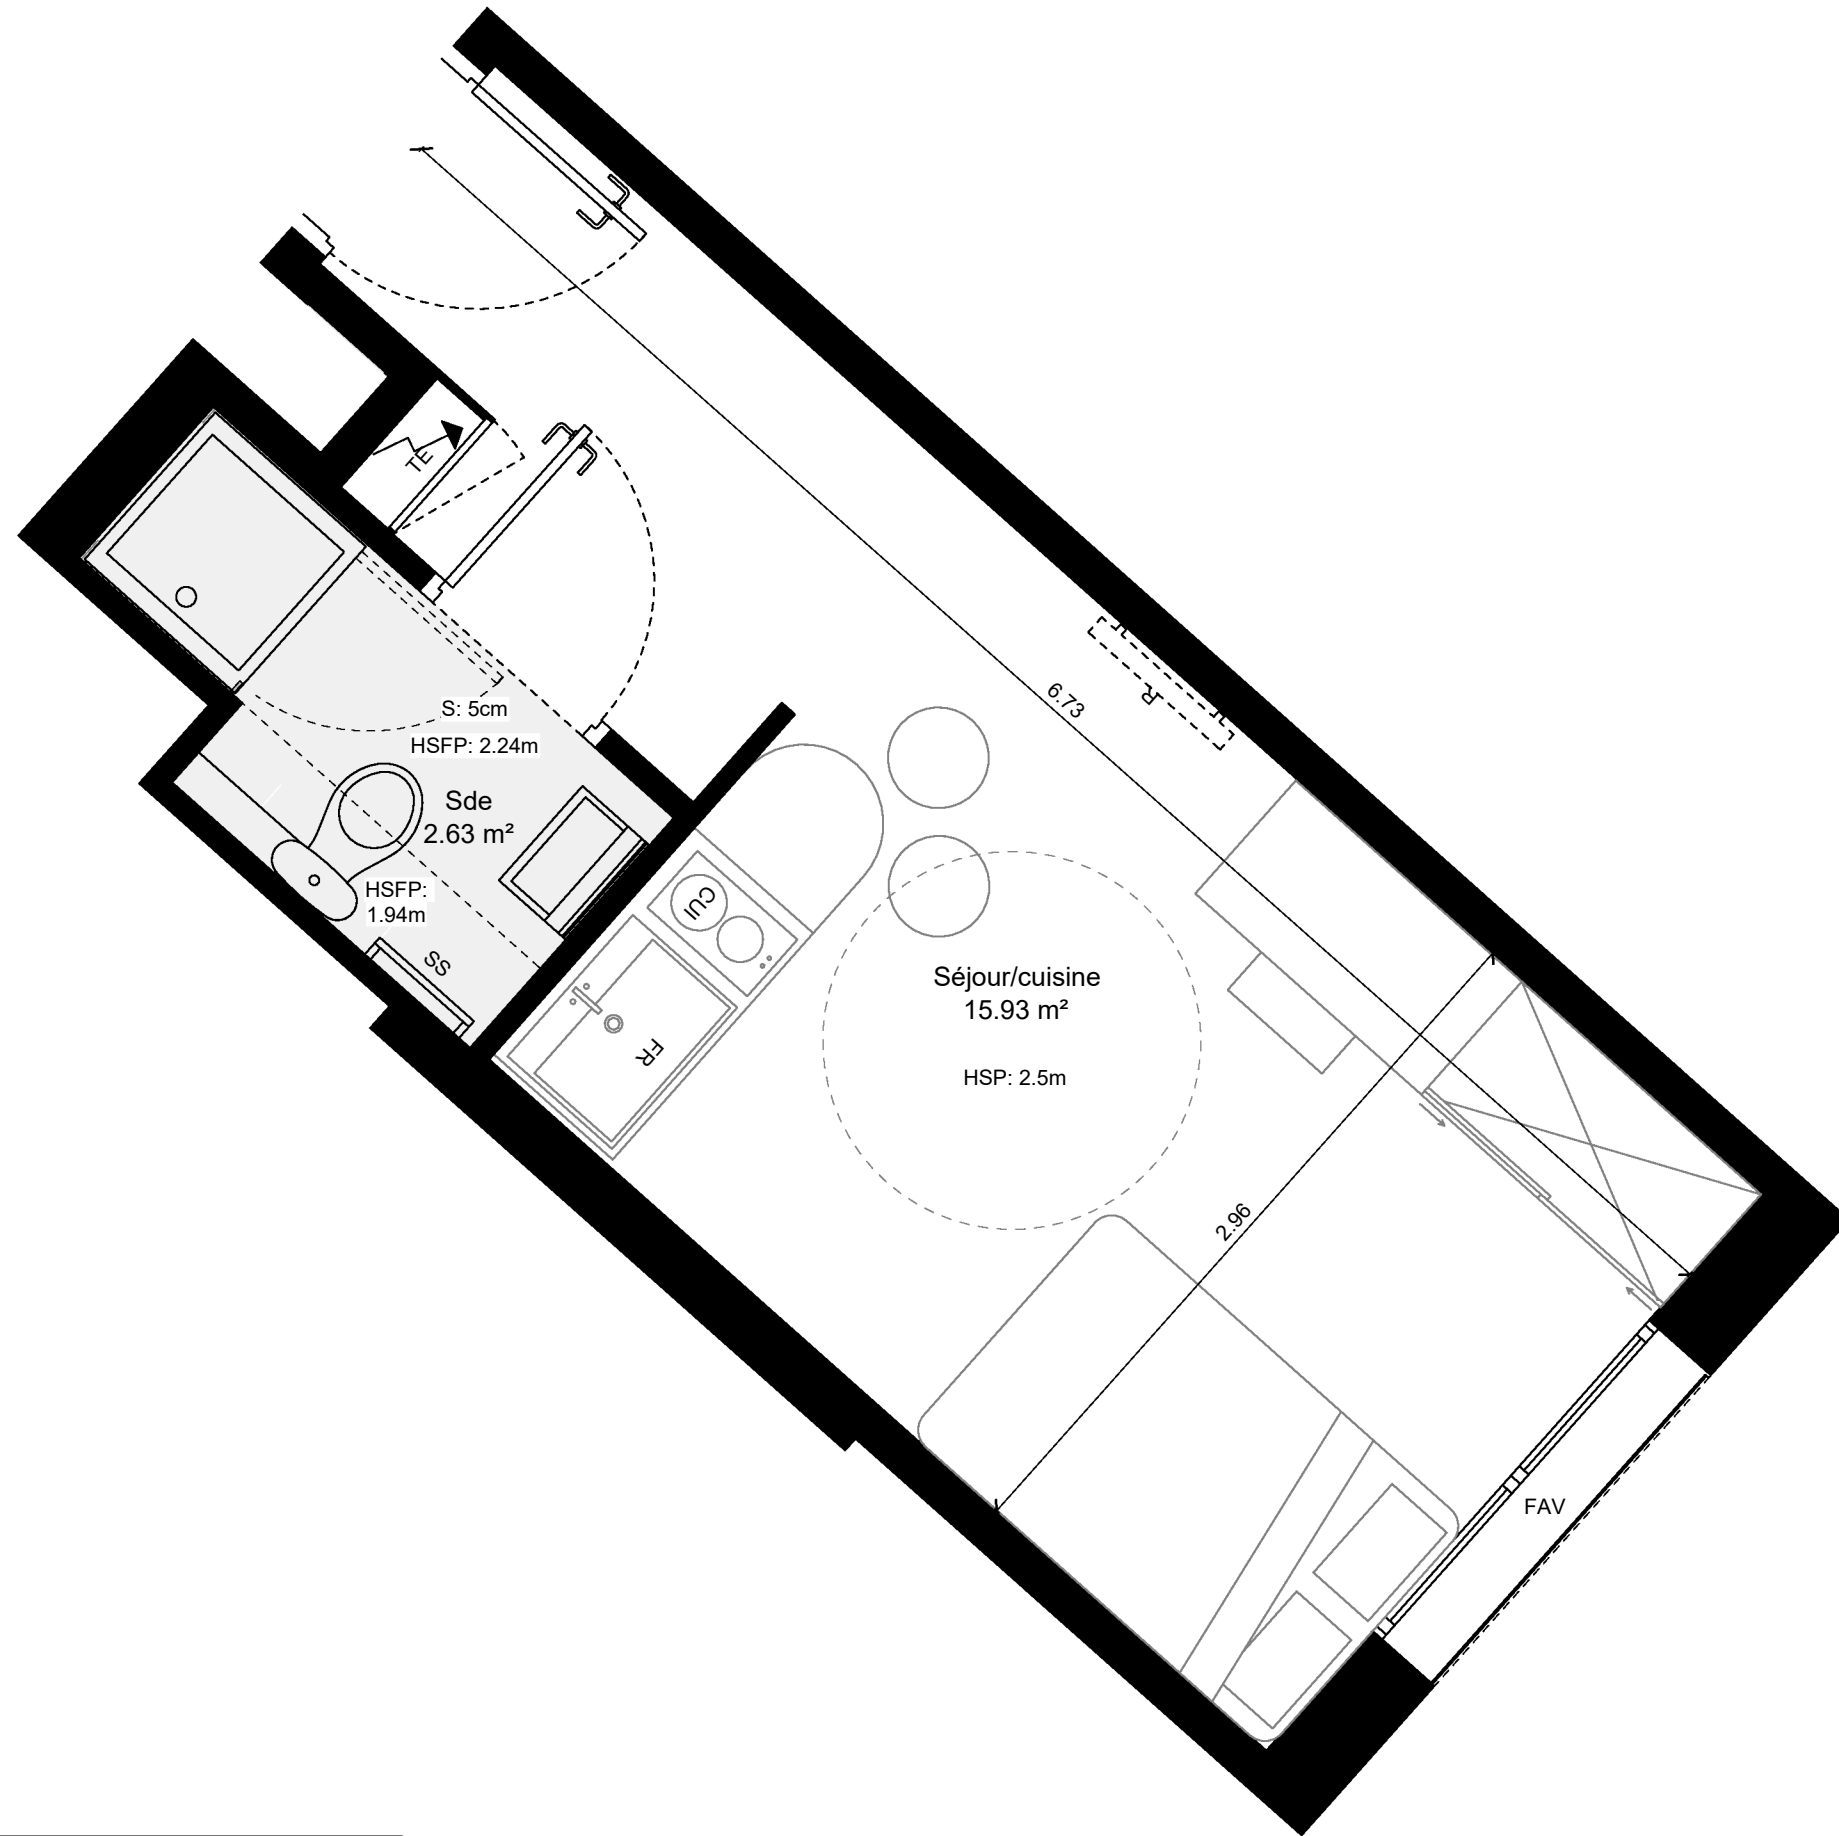


Diagram of a beam of length 2m. The beam is supported by a pin support at the left end (0m) and a roller support at the right end (2m). A uniformly distributed load of 10 kN/m is applied over a 0.5m section of the beam, starting at 0.5m from the left end. The load is represented by a black rectangle from 0.5m to 1m.

Échelle	Date	Indice
1:30	15/09/2025	00